



# Trigger

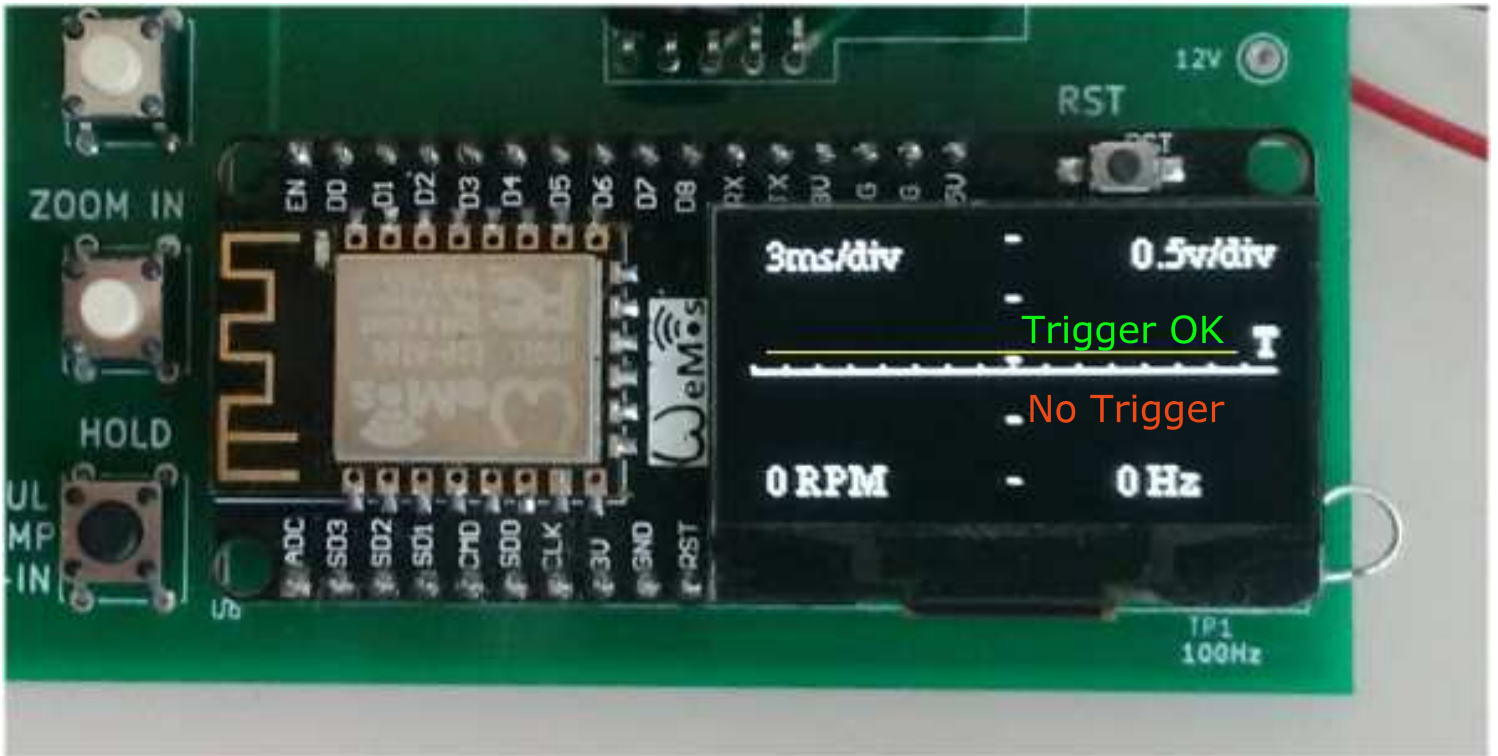

**Trigger level** decide when acquisition and display begin. When the input signal is higher than trigger level, signal is captured and display is steady.

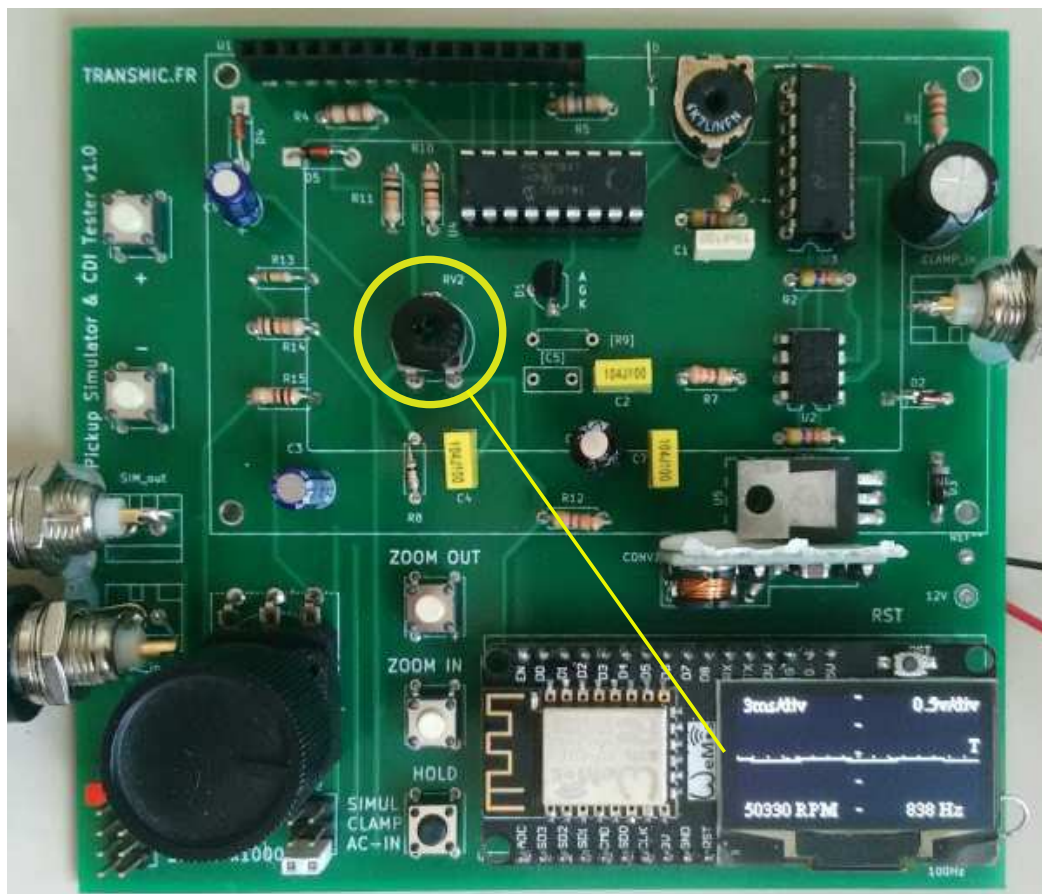

**Trick:** You can force the trigger by moving the line up with the **Position** potentiometer RV2.